

Lightbar VX1000-CB SM



Double ECE-Certification – 2 x ECE R112

The necessary tests and approvals were carried out and an ECE type approval was granted. Central single mount possible. ECE reference number: 37.5 + 37.5



Mieszana wiązka światła

Zaprojektowane do oświetlenia obszaru zarówno blisko, jak i daleko od pojazdu.



Up to 525m long light beam

See and be seen with OSRAM. Special curved reflector design with extraordinary perforation.



On-road & Off-road

Różnorodne możliwości zastosowania i elastyczność w użyciu. Na drogach i off-road, w terenie, do pracy i w wolnym czasie.



Wprowadź światło w swoje życie z lampami drogowymi i roboczymi OSRAM LEDriving

Considerable foresight on dark country roads, forest paths, off the beaten tracks, off-road and on-road- this can be achieved with the OSRAM LEDriving Lightbar VX1000-CB SM. With its 36 powerful, high-performance OSRAM long-life LEDs, the VX1000-CB SM has a range of up to 525 meters and thus offers the driver impressive foresight on-road and off-road. Even in dim light and reduced visibility due to external environmental influences, the OSRAM LEDriving Lightbar VX1000-CB SM with up to 6000 Kelvin can provide conditions similar to daylight. The power package with up to 6000 lumens of luminosity scores with highest optical efficiency and homogeneous light distribution. This results in the possibility of an improved view for you and the improved visibility of your vehicle by other road users, and consequently also increased safety on-road and off-road. Whether on-road or off-road - The OSRAM LEDriving Lightbar VX1000-CB SM impresses with its powerful performance and a long service life with up to 5000 hours. Versatile applicable, it defies numerous environmental influences and, thanks to high-quality materials such as the aluminum housing and the stable polycarbonate lens, it is particularly light and at the same time robust and resistant. The OSRAM LEDriving Lightbar VX1000-CB SM has been tested and validated with the IP-Protection Class IP67 in our DIN certified environmental simulation laboratory for extreme external influences regarding water, dust, impacts, heat, cold and permanent vibration. The integrated driver and the thermal management system regulate the temperature of the LED Lightbar and can thus prevent damage from overheating. The polarity protection inhibits the wrong polarity of the voltage supply and can thus prevent possible damage by automatically switching off the LEDs. On-road and off-road, the OSRAM LEDriving Lightbar VX1000-CB SM is an effective and efficient addition to your vehicle. No registration or entry in the vehicle documents is necessary for these ECE-certified LED driving lights 2)ECE reference number: 37.5 + 37.5 The OSRAM LEDriving Lightbar VX1000-CB SM can be attached to cars, trucks, agricultural machinery, farm machinery, commercial vehicles, construction vehicles, caravans, off-road vehicles and quads 2) The OSRAM LEDriving Lightbar VX1000-CB SM is versatile applicable and flexible in use. 2) OSRAM LEDriving Driving Lights are approved according to ECE regulations and may therefore be installed and operated on public roads. Please note: Special installation regulations apply. In addition to ECE approval of the product, individual special requirements and legislation of the countries must be observed.

Karta katalogowa produktu

Dane techniczne

Informacje o produkcie

Oznaczenie produktu	LEDDL120-CB SM
Zastosowanie (specyfikacja produktu)	Dodatkowe światła drogowe

Dane elektryczne

Napięcie nominalne	12/24 V
Moc znamionowa	108,00 W
Napięcie probiercze (pomiarowe)	13,5 V


Dane fotometryczne

Strumień świetlny	6000 lm
Temperatura barwowa	6000 K
Strumień świetlny o wartości 1 lx	525 m

Dane o module LED

Liczba LED w module	36
---------------------	----

Wymiary i waga

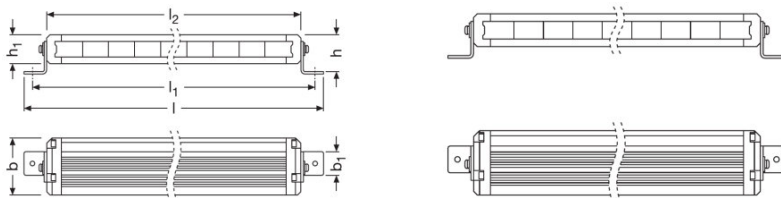

Masa produktu	2840,00 g
Długość	1031 mm
Szerokość	67,0 mm
Wysokość	35 mm

Trwałość




Trwałość Tc	5000 h
Gwarancja	2 years

Karta katalogowa produktu

Kod produktu	Opis produktu	Opakowanie (liczba produktów / opakowanie)	Wymiary (długość x szerokość x wysokość)	Objętość	Waga brutto
4062172232159	Lightbar VX1000-CB SM	Składane pudełko 1	1112 mm x 110 mm x 123 mm	15.05 dm ³	3351.00 g
4062172232166	Lightbar VX1000-CB SM	Karton wysylkowy 4	1137 mm x 242 mm x 279 mm	76.77 dm ³	14204.00 g

Wymieniony kod produktu oznacza najmniejszą ilość produktu, jaka może być zamówiona. Jednostka transportowa może zawierać jedną sztukę lub więcej. Składając zamówienie prosimy o zamawianie ilości odpowiadających jednej lub wielokrotności jednostki transportowej.

Pobierz dane

Plik	
	Broszury OSRAM Lightbar VX1000-CB SM Flyer (EN)
	Film przedstawiający zastosowanie Product Video OSRAM LEDriving Lightbar VX1000-CB SM (EN)
	Film przedstawiający zastosowanie driving and working lights Island Trailer (EN)
	Video Video OSRAM LEDriving driving & working
	Video Product Video OSRAM LEDriving Lightbar VX1000-CB SM

Informacje prawne

Legal advice: The installation of the OSRAM LEDriving Lightbar VX1000-CB SM is fully ECE compliant and therefore registration free. This does not include individual custom requirements of countries, in addition to the standardized ECE certification of the product. 1) Precise terms and conditions at: www.osram.com/am-guarantee 2) OSRAM LEDriving Driving Lights are approved according to ECE regulations and may therefore be installed and operated on public roads. Please note: Special installation regulations apply. In addition to ECE approval of the product, individual special requirements and legislation of the countries must be observed.

Szczegółowe informacje na temat gwarancji na stronie: www.osram.pl/am-gwarancje

Wskazówki dotyczące zastosowania

Więcej szczegółowych informacji dotyczących grafik i zastosowania znajduje się w karcie katalogowej produktu

Oświadczenie

Zastrzega się możliwość zmian bez uprzedzenia. Błędy i ominięcia są możliwe. Należy zawsze upewnić się czy korzystasz z najnowszej wersji katalogu.

