

# 12V

# 5250A

# GB250+



## COMMERCIAL-GRADE LITHIUM JUMP STARTER.™

### 16L+

#### GAS AND DIESEL.

It's commercial in every way. It jump starts almost every type of vehicle and equipment, including semi-trucks (up to class 8), motorhomes, coaches, buses, mining, agricultural, construction, and vocational equipment - 6, 8, 12, and 16 cylinder - and more.



#### 60-SECOND TIMER.

An automatic power conservation feature. Start vehicle within 60 seconds. After the 60-second timeout is complete, the unit must be powered off, then back on, to initiate a new jump-start sequence.

### 2.0

#### ULTRA SAFE 2.0.

Safe and easy to use battery jump starter pack without the worry of incorrect connections or sparks. Safely connect to any 12-volt battery with our mistake-proof design featuring spark-proof technology and reverse polarity protection.

### 600 LUMENS

#### MULTI-FUNCTIONAL.

It's not just a lithium jump starter but also a portable power bank for recharging smartphones, tablets, and other USB devices, with an ultra-bright 600-lumen LED flashlight with seven light modes, including emergency strobe and SOS.



**NOCO**

30339 Diamond Parkway, #102  
Glenwillow, OH 44139 | USA  
1.800.456.6626

no.co

LEAD ACID

WET

GEL

MF

EFB

AGM

AUTO | MARINE | RV | POWERSPORT | LAWN & GARDEN



## INTERFACE

### POWER LED

The charger is in standby or the battery voltage is too low for the charger to detect.



### ERROR

Illuminates Red if reverse polarity is detected. Blinks "on" and "off" in various sequences (from 1 to 6 blinks) to convey error conditions.



### HOT/COLD INDICATOR

Illuminates solid or flashes blue when internal temperature is too low. Illuminates solid or flashes red when internal temperature is too high.



### CHARGE LED

Indicates the charge level of the internal battery.



### BOOST LED

Illuminates white when boost is active. The LED flashes white when manual override feature is active.



### VOLTMETER

Built-in voltmeter displays the voltage of the vehicle's battery for enhanced diagnostics and troubleshooting.




## USB RECHARGE.

Charge virtually any USB device, including smartphones and tablets. Remote power for a wide range of 12V devices including tire pumps, inverters, lights, phone chargers and more.


## RECHARGE TIME: 8.5hr

From 0-100% 4X Faster. Charge directly from the vehicle's 12-volt auxiliary port or the XGC4 4-Amp Power Adapter to recharge it's 242 watt-hours lithium-ion battery in 8.5 hours.

## WHAT'S IN THE BOX

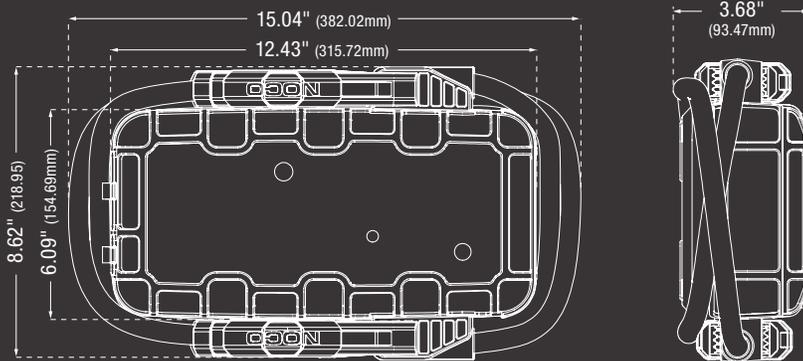

\*Accessories not to scale with GB250+

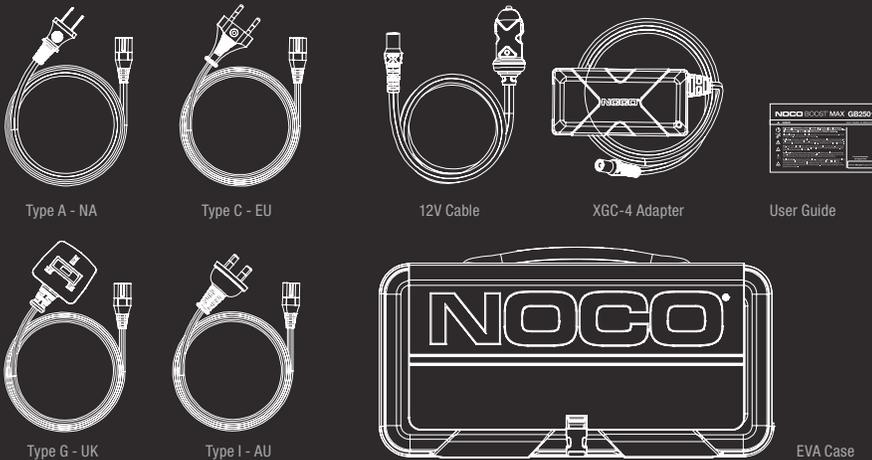

## TECHNICAL SPECIFICATIONS

<b>INTERNAL BATTERY:</b>	242 WH Lithium Ion
<b>PEAK CURRENT RATING:</b>	5250A
<b>OPERATING TEMPERATURE:</b>	-4°F to +122°F (-20°C to +50°C)
<b>CHARGING TEMPERATURE:</b>	32°F to +104°F (0°C to +40°C)
<b>12V (INPUT):</b>	12V/5A (14V Max)
<b>12V (OUTPUT):</b>	12V, 15A Max
<b>USB (OUTPUT):</b>	5V, 2.1A Max Each
<b>HOUSING PROTECTION:</b>	IP65 (w/Ports Closed)
<b>COOLING:</b>	Natural Convection
<b>WEIGHT:</b>	14.7 lbs (6.67kg)
<b>VOLUMETRICS:</b>	<p><b>Inner Carton:</b> Dimensions: 19.21" x 13.6" x 9.64" Weight: N/A UPC: 046221190403</p> <p><b>Master Carton:</b> Dimensions: 19.48" x 14.17" x 10.51" Weight: 21.6lbs Quantity: 1 UCC: 00046221190403</p> <p><b>Units Per Pallet:</b> 56 Units</p>

**NOCO**

30339 Diamond Parkway, #102  
Glenwillow, OH 44139 | USA  
1.800.456.6626

no.co

