
Hankook & Company


한국앤컴퍼니 주식회사


286, Pangyo-ro, Bundang-gu, Seongnam-si, Gyeonggi-do, 13494 Korea


> Type No.: EFB 58030 Created: 05.02.2022 Modified: 05.02.2022

TECHNICAL DATA SHEET

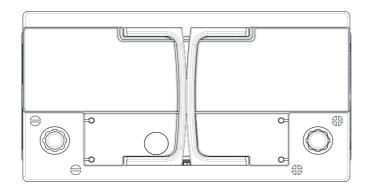



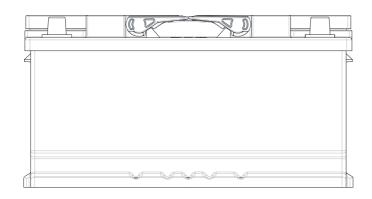



PERFORMANCE			CONTAINER		
VOLTAGE(V):	12	V	Group:	L4	D.GRAY
C20(Ah):	80	Ah	Hold Down:	B13	
RC(min):	160	min	Please refer to the catalog or our website for the details of hold down		
CCA(A):	800	EN	types of the battery container.		
Vibration:	V3		COVER		
Endurance:	E3		Type:	Heat Sealed	D.GRAY
Water consumption:	W4		Polarity:	L	
Technology:	Flooded		Terminals:	Standard	
Grid alloy:	Ca/Ca		Filter:	2 Filters both sides	
WEIGHT AND STD. DIMENSION			HANDLES		
Battery weight(kg):	22,80		Handles:	2 Handle	
Volume acid(I):	4,58			REMARK	
Length(mm):	315				
Width(mm):	174				
Height(mm):	190				
Total Height(mm):	190				

This document includes confidential data, is not contractual and could be changed without notice. Any use, copy or distribution has to be authorised in writing by HANKOOK & COMPANY.