

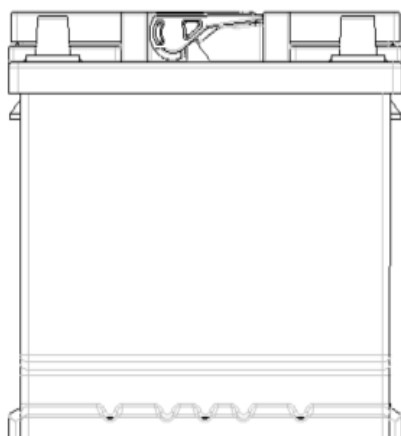
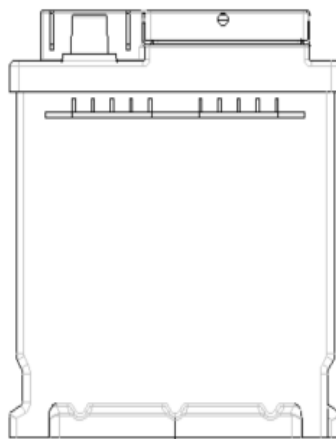


## TECHNICAL DATA SHEET

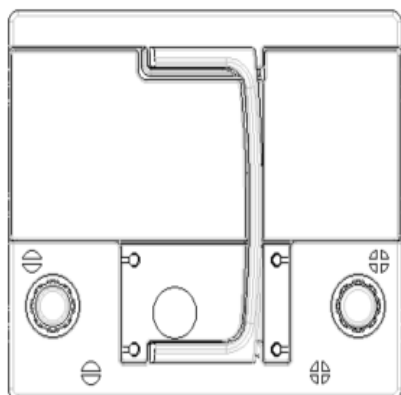

| PERFORMANCE               |         |    | CONTAINER   |                      |        |
|---------------------------|---------|----|---|----------------------|--------|
| VOLTAGE:                  | 12      | V  | Group:  | L1                   | L.Gray |
| C20:                      | 54      | Ah | Hold Down:  | B13                  |        |
| CCA:                      | 530     | EN | Please refer to the catalog or our website for the details of hold down types of the battery container. |                      |        |
| Vibration:                | V3      |    | COVER   |                      |        |
| Endurance:                | E1      |    | Type:   | Heat sealed          | L.Gray |
| Water consumption:        | W4      |    | Polarity:   | L                    |        |
| Technology:               | Flooded |    | Terminals:  | Standard             |        |
| Grid alloy:               | Ca/Ca   |    | Filter:   | 2 Filters both sides |        |
| WEIGHT AND STD. DIMENSION |         |    | HANDLES   |                      |        |
| Battery weight:           | 12,8    | kg | Handles:  | 1 handle             |        |
| Volume acid:              | 2,9     | l  | REMARK  |                      |        |
| Length:                   | 208     | mm |   |                      |        |
| Width:                    | 174     | mm |   |                      |        |
| Height:                   | 190     | mm |   |                      |        |
| Total Height:             | 190     | mm |   |                      |        |