
Hankook & Company

TECHNICAL DATA SHEET

한국앤컴퍼니 주식회사 286, Pangyo-ro, Bundang-gu, Seongnam-si, Gyeonggi-do, 13494 Korea

> Type No.: SHD 64589 Created : 05.02.2022 Modified : 05.02.2022

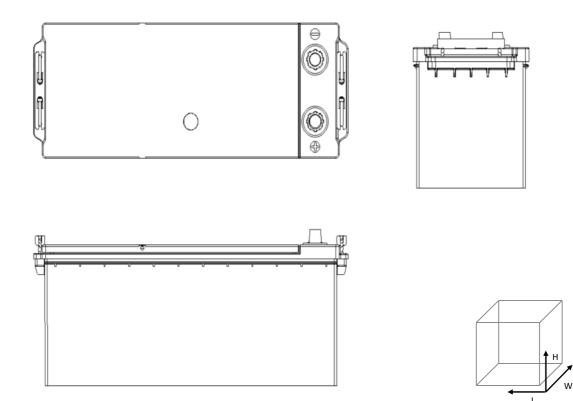

PERFORMANCE			CONTAINER		
VOLTAGE:	12	V	Group:	EN A	L.Gray
C20:	145	Ah	Hold Down:	B0/B13	
CCA:	800	EN	Please refer to the cata	log or our website for the deta	ails of hold down
Vibration:	V3		types of the battery container.		
Endurance:	-		COVER		
Water consumption:	W4		Type:	Heat sealed	L.Gray
Technology:	Flooded		Polarity:	R	
Grid alloy:	Ca/Ca		Terminals:	Standard	
			Filter:	2 Filters both sides	
WEIGHT AND STD. DIMENSION			HANDLES		
Battery weight:	35,9	kg	Handles:	2 handles	
Volume acid:	9,4	I		REMARK	
Length:	511	mm			
Width:	188	mm			
Height:	217	mm			
Total Height:	217	mm			

This document includes confidential data, is not contractual and could be changed without notice. Any use, copy or distribution has to be authorised in writing by HANKOOK & COMPANY.